



SOLARPLUS

PP210A-Q12D1

Monocrystalline Bifacial PERC Cell

PRODUCT CHARACTERISTICS



HIGH CONVERSION EFFICIENCY
WITH HIGH RELIABILITY



LOW LIGHT-INDUCED
DEGRADATION



STABLE MANUFACTURING PROCESS,
UNIFORM ELECTRICAL PERFORMANCE



BOTH SIDES CAN
GENERATE ELECTRICITY



LOW HOT SPOT
EFFECT



LOW MISMATCH OF CELL PERFORMANCE
DURING ENCAPSULATION



EXCELLENT POWER GENERATION PERFORMANCE
UNDER LOW IRRADIATION

PP210A-Q12D1

ELECTRIC PERFORMANCE

Eff(%)	Pmpp(W)	Vmpp(V)	Imp(A)	Voc(V)	Isc(A)
23.1	10.18	0.590	17.261	0.690	18.186
23.0	10.14	0.589	17.216	0.689	18.166
22.9	10.10	0.587	17.206	0.688	18.140
22.8	10.05	0.586	17.151	0.687	18.125
22.7	10.01	0.584	17.140	0.686	18.108
22.6	9.97	0.583	17.101	0.685	18.088
22.5	9.92	0.581	17.074	0.685	18.062
22.4	9.88	0.579	17.064	0.684	18.049
22.3	9.83	0.577	17.036	0.682	18.030
22.2	9.79	0.575	17.026	0.681	18.016
22.1	9.75	0.574	16.986	0.680	17.995

Under standard test condition: 1000W/m², AM 1.5, 25±2°C


TEMPERATURE COEFFICIENTS

TkCurrent	+(0.07±0.015) %/K
TkVoltage	-(0.36±0.03) %/K
TkPower	-(0.38±0.02) %/K


PRODUCT FEATURES

Dimension	210mmx210mm(±0.25mm), Φ295mm±0.25mm
Cell Thickness	170μm(±20μm)
Front side	12BB, silicon nitride antireflection coating
Back side	12BB, silicon nitride antireflection coating


PRODUCT DESIGN

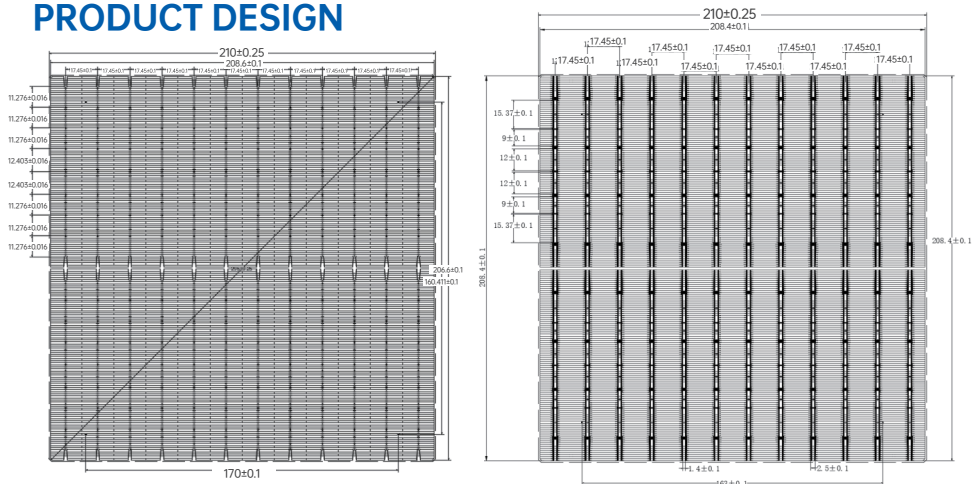

IV CURVE

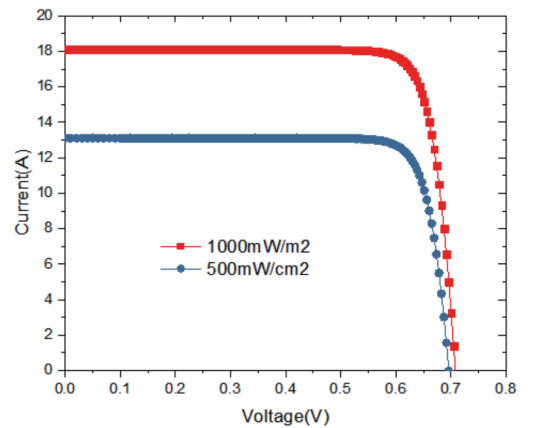

SPECTRAL RESPONSE(SR)

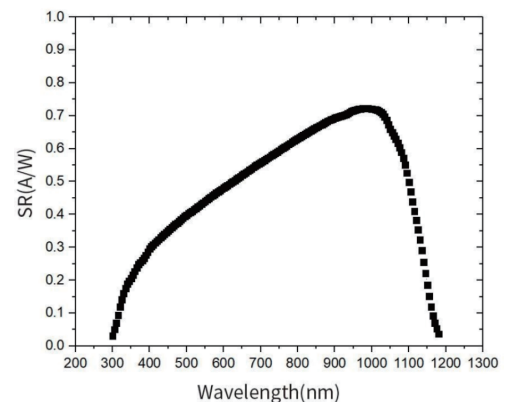

SOLAR N PLUS NEW ENERGY TECHNOLOGY CO., LTD

No.1 Jianye road, Zhongxin Suchu Industrial Development Zone, Chuzhou City, 239000, Anhui Province, China
025-52806120
www.solarnplus.com

Solar N Plus reserves the sole right of interpretation.
Version No.A/0.20230821