

Solar N Plus New Energy Technology Co., LTD

Produce Specification	Produce Name	Monocrystalline High Efficiency PV Module	Document Number	
	Document Name	Spec. Of SP-G12/120HG585-605W	Version Number	A/0

Typical Electrical Characteristics at Standard Test Conditions (STC)

Typical Type	Unit	SP-G12/120HG585W	SP-G12/120HG590W	SP-G12/120HG595W	SP-G12/120HG600W	SP-G12/120HG605W
Max-Power	Pm(W)	585	590	595	600	605
Power Tolerance	W	0~+5				
Max-Power Voltage	Vm(V)	33.50	33.70	33.90	34.10	34.30
Max-Power Current	Im(A)	17.46	17.50	17.55	17.59	17.64
Open-Circuit Voltage	Voc(V)	40.90	41.10	41.30	41.50	41.70
Short-Circuit Current	Isc(A)	18.38	18.42	18.47	18.52	18.57


STC:AM=1.5, 1000W/m² irradiance, Module Temperature 25°C

Certifications	TUV
-----------------------	-----


OPERATING CONDITIONS		MECHANICAL PROPERTY	
Max. system voltage	DC1500V(IEC)	Dimension(L×W×H)	2172mm×1303mm×30mm
Max. series fuse rating	30A	Weight	35.3kg
Operating temperature range	-40°C~+85°C	Cell	12BB single crystal / 210*105mm
Mechanical load	5400Pa/2400Pa	Glass type	Antireflection coated heat-enhanced glass /2.0mm
Max. hailstone impact(diameter/velocity)	Φ25mm hail, from 1 m of distance at 23 m/s	Frame	Anodized Aluminum alloy
Application Class	Class A	Junction Box	IP68
Fire Class	Class C	Cable	4mm ² ,300mm or Customized•Length
		Connector	MC4 Compatible

IV Curve

I-V Curves of SP-G12/120HG605W at different irradiance

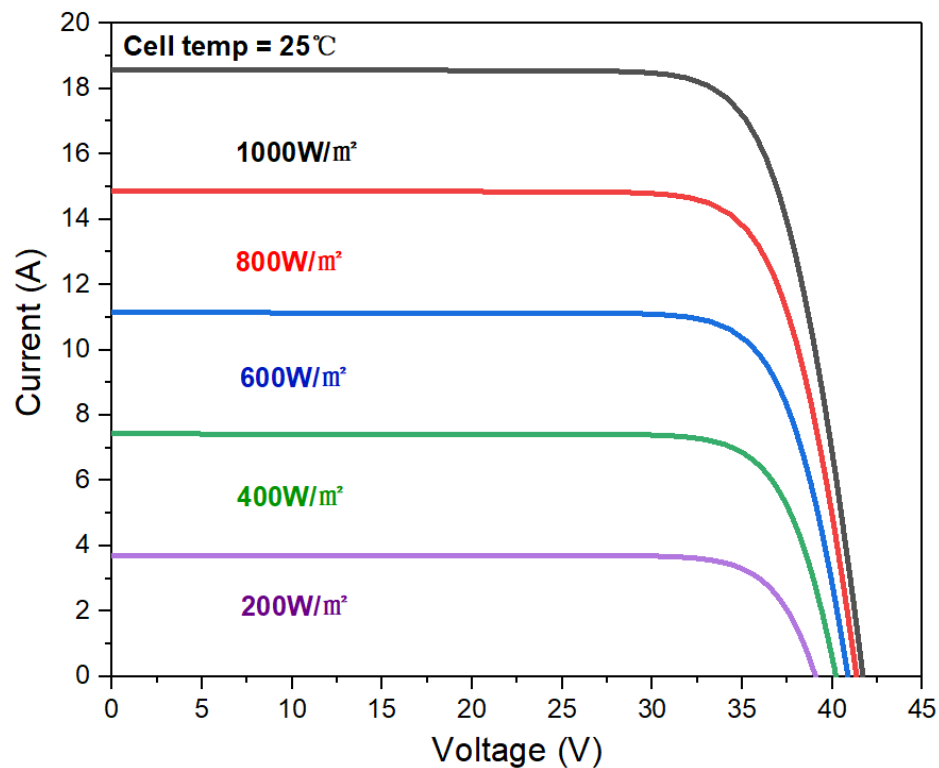

I-V Curves of SP-G12/120HG605W at different cell temperature

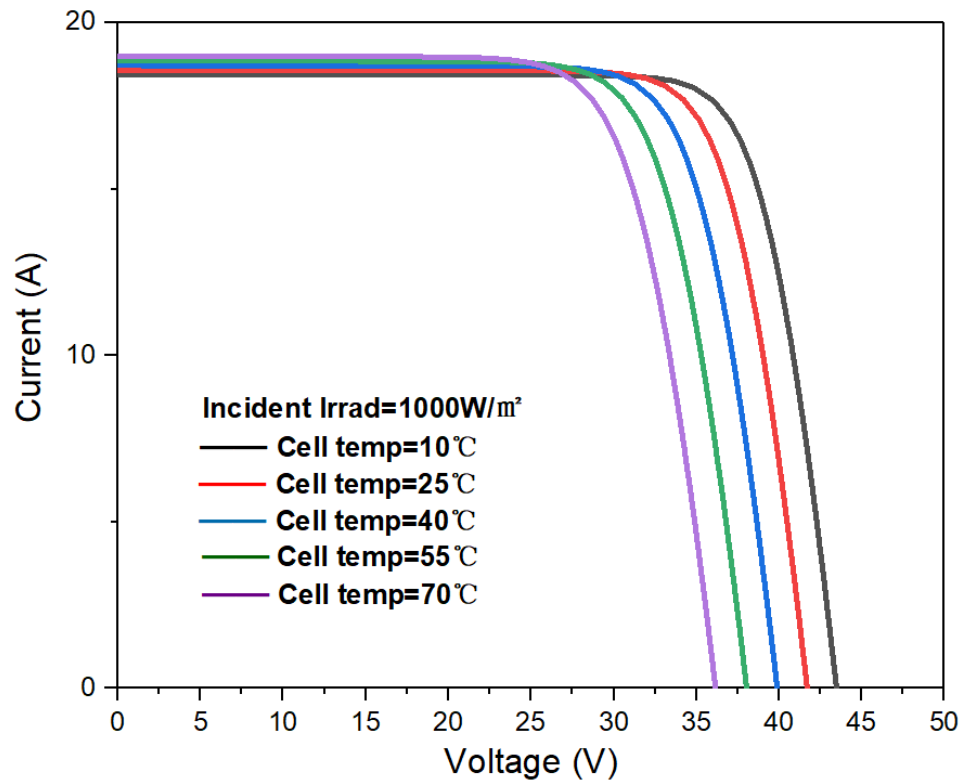

Performance Warranty

Within the first year from the date of installation and normal operation, the output power shall not be less than 98 % of the product's minimum output power as set forth in the specifications, Afterwards, maximum 0.45% output decrease per year. After 30 years, the product's output power shall not be less than 84.95% of its minimum output power as set forth in the specifications.

Dimensions

