

# Solar N Plus New Energy Technology Co., LTD

<b>Produce Specification</b>	<b>Produce Name</b>	Monocrystalline High Efficiency PV Module	<b>Document Number</b>	
	<b>Document Name</b>	Spec. Of SP-N16/156HG625-640W	<b>Version Number</b>	A/0

## Typical Electrical Characteristics at Standard Test Conditions (STC)

Typical Type	Unit	SP-N16/156HG625W	SP-N16/156HG630W	SP-N16/156HG635W	SP-N16/156HG640W
Max-Power	Pm(W)	<b>625</b>	<b>630</b>	<b>635</b>	<b>640</b>
Power Tolerance	W	0~+5			
Max-Power Voltage	Vm(V)	48.26	48.35	48.44	48.52
Max-Power Current	Im(A)	12.95	13.03	13.11	13.19
Open-Circuit Voltage	Voc(V)	56.40	56.54	56.68	56.82
Short-Circuit Current	Isc(A)	13.47	13.54	13.61	13.68


STC:AM=1.5, 1000W/m<sup>2</sup> irradiance, Module Temperature 25°C

<b>Certifications</b>	TUV
-----------------------	-----


<b>OPERATING CONDITIONS</b>		<b>MECHANICAL PROPERTY</b>	
Max. system voltage	DC1500V(IEC)	Dimension(L×W×H)	2465mm×1134mm×30mm
Max. series fuse rating	25A	Weight	34.6kg
Operating temperature range	-40°C~+85°C	Cell	16BB single crystal / 182*91mm
Mechanical load	5400Pa/2400Pa	Glass type	Antireflection coated heat-enhanced glass /2.0mm
Max. hailstone impact(diameter/velocity)	Φ25mm hail, from 1 m of distance at 23 m/s	Frame	Anodized Aluminum alloy
Application Class	Class A	Junction Box	IP68
Fire Class	Class C	Cable	4mm <sup>2</sup> ,300mm or Customized•Length
		Connector	MC4 Compatible

## IV Curve

I-V Curves of SP-N16/156HG640W at different irradiance

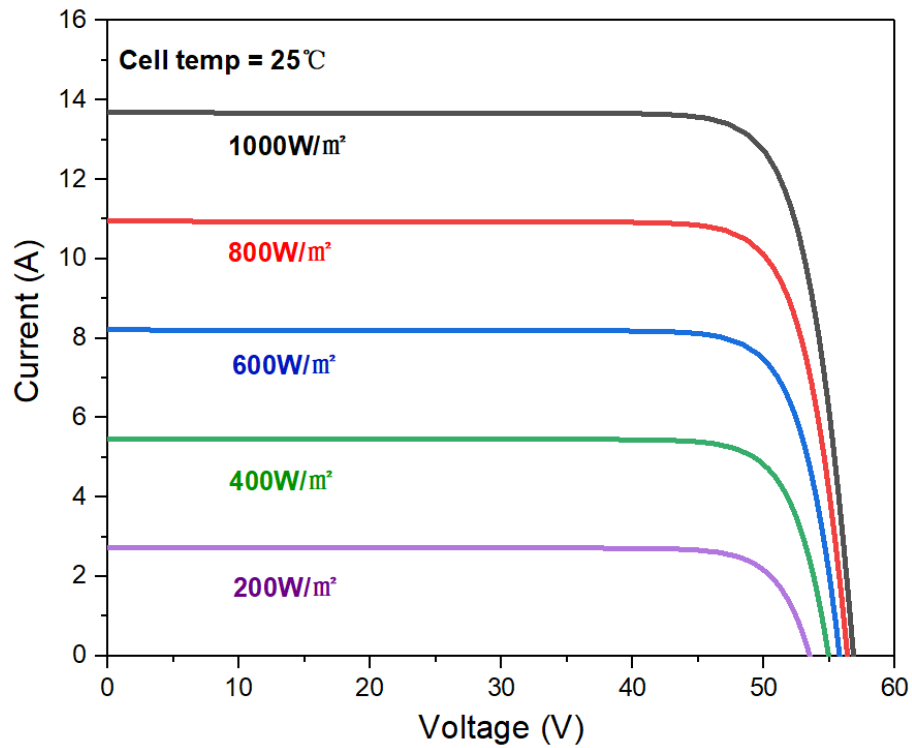

I-V Curves of SP-N16/156HG640W at different cell temperature

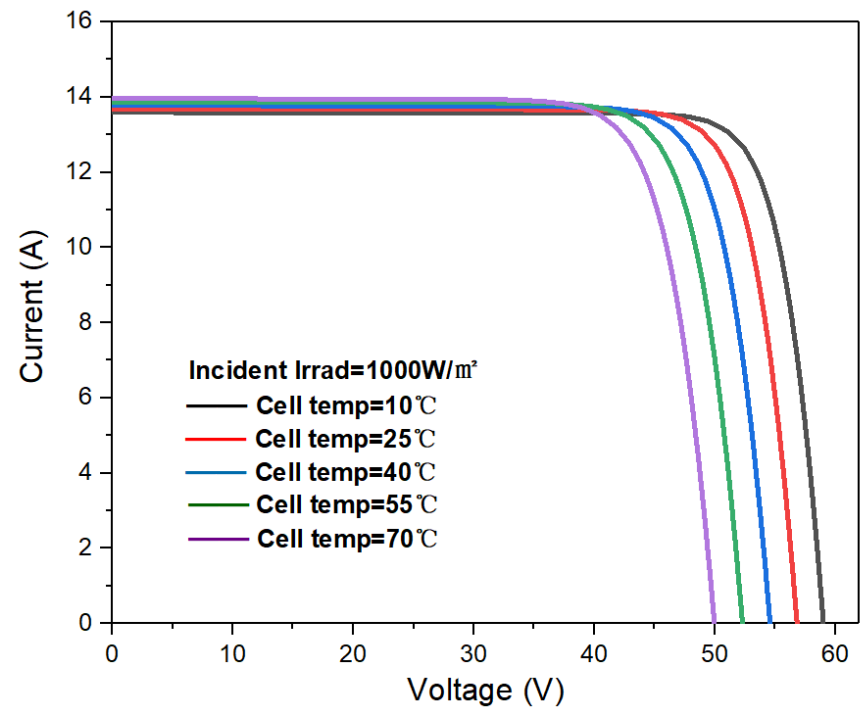

## Performance Warranty

Within the first year from the date of installation and normal operation, the output power shall not be less than 99 % of the product's minimum output power as set forth in the specifications, Afterwards, maximum 0.4% output decrease per year. After 30 years, the product's output power shall not be less than 87.4% of its minimum output power as set forth in the specifications.

# Dimensions

